

# SMMSi / SHRMi VRF Indoor Unit MMD-AP0484H2UL - High Static Duct

**TOSHIBA**  
*Carrier*

## Submittal Data

Job Data \_\_\_\_\_ Location \_\_\_\_\_  
 Buyer \_\_\_\_\_ Buyer PO # \_\_\_\_\_ Carrier # \_\_\_\_\_  
 Unit Number \_\_\_\_\_ Model Number \_\_\_\_\_  
 Performance Data Certified By \_\_\_\_\_ Date \_\_\_\_\_



### SMMSi / SHRMi VRF High Static Ducted Features

- R-410A Refrigerant
- Five sizes from 30,000 to 96,000 Btu/h
- Rear return
- 208/230 V PSC (Permanent Split Capacitor) motor
- Optional wired or wireless controls
- Five-year parts limited warranty

Indoor Unit Model	MMD-AP0484H2UL	
<b>PERFORMANCE</b>		
Cooling Rated Capacity	Btu/h	48,000
Heating Rated Capacity	Btu/h	54,000
Fan Type (Qty)		Centrifugal (2)
Airflow, Standard Range	CFM	988-1447
Sound Pressure, 208 V (L / M / H)	dBA	N/A / 44 / 47
Sound Pressure, 230 V (L / M / H)	dBA	43 / 46 / 49
External Static Pressure, 208 V (L / M / H*)	in. wg	N/A / 0.296 / 0.606
External Static Pressure, 230 V (L / M / H*)	in. wg	0.114 / 0.519 / 0.801
<b>ELECTRICAL</b>		
Power Supply	V/Ph/Hz	208-230/1/60
Power Consumption (208/230 V)	kW	0.38/0.41
Full Load Amps (FLA)	A	2.92
Minimum Circuit Amps (MCA)	A	3.65
Maximum Overcurrent Protection (MOCP)	A	15

<b>MOTOR</b>		
Motor Type	208/230 V, 3 Tap, PSC	
Motor Watts		260
<b>PHYSICAL DATA</b>		
Pipe Connection Size - Liquid (High Pressure)	in.	3/8 (Flare)
Pipe Connection Size - Gas (Low Pressure)	in.	5/8 (Flare)
Pipe Connection Size - Drain (OD)	in.	1-1/4
Pipe Connection Size - Drain (ID)	in.	1
Refrigerant	R-410A	
External Finish	Zinc Hot Dipped Steel Plate	
Unit Width	in.	47-3/16
Unit Height	in.	15
Unit Depth	in.	26
Unit Net Weight	lb	154




\*Low, Medium, High Taps. Medium Tap set from factory.

### ACCESSORIES (Optional)

- Lite Vision Plus Remote Controller (7-Day Programmable) RBC-AMS51E-ES
- Simple Wired Remote Control RBC-AS41UL
- Remote Sensor TCB-TC41LUL
- Wired Remote Controller RBC-AMT32UL



Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.

# DIMENSIONAL DRAWING INDOOR UNIT HIGH STATIC DUCT MMD-AP0484H2UL

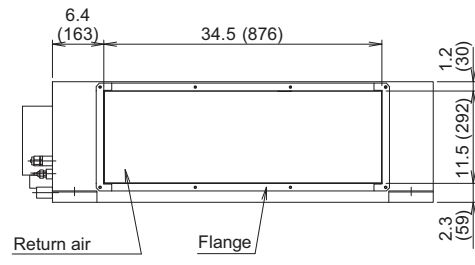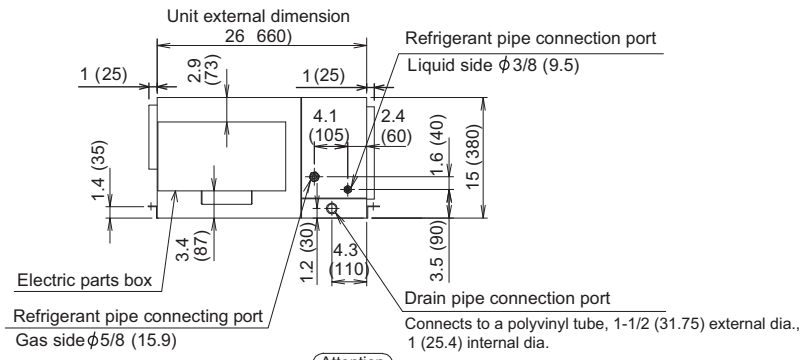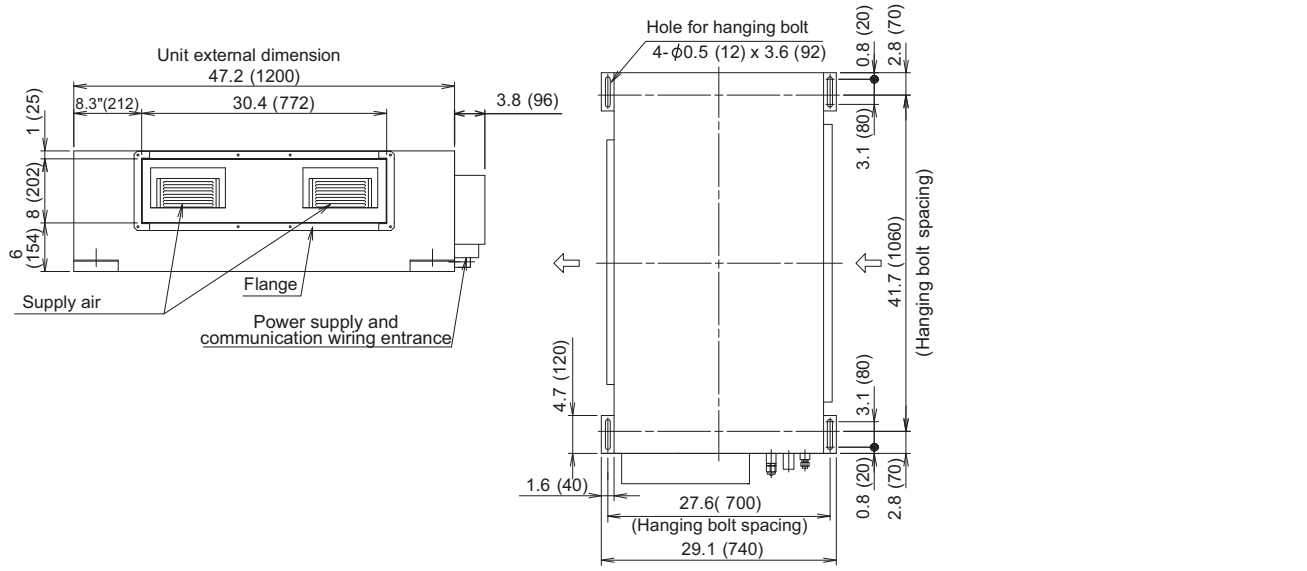

**Attention**  
 Drain piping must be assembled in compliance with local codes

**Clearance required for installation or service work**

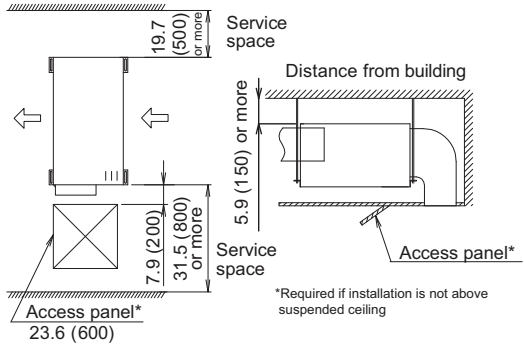

- NOTES:**
1. Filters are field supplied per local codes.
  2. Provide sufficient access for filter removal and replacement.
  3. The drain connection is ABS. If the drain piping is PVC, the correct glue must be used.
  4. Dimensions are in inches (mm).

